

# The CJV150 series delivers...


High-quality printing and sharp, accurate cutting for fresh, brilliant ideas and hundreds of different applications.

# CJV150-75



For simple stickers and labels

The small-footprint CJV150-75 is perfect or stickers, labels and PoS materials.





For larger signage and PoS marketing naterials

he wider but modestly sized C<sub>2</sub>IV150-130 provides even more flexibility.



For banners and large-size posters

The CJV150-107 delivers a quick output with high quality print. Ideal for pop-up banners and large posters



For cost effective production of large, high-quality signage and vehicle wrapping films

The CJV150-160 has the widest working width in the range, and satisfies a wide variety of production demands.

#### The multiple functions of the CJV150 models ensure high-quality printing and highaccuracy cutting enabling the production of labels, stickers and vehicle wraps with ease.

#### Continuous-register mark-detection function enables continuous media cutting.

The CJV150 automatically detects all register marks set by RasterLink6 on the media, and cuts contour lines precisely by utilising simultaneous automatic calibration.



#### Print and cut on no-register mark media / Cut and print function

Media up to 1m in length does not require register marks, reducing media wastage.

#### Segment correction function facilitates precision cutting over longer-length prints.

This function detects intermediate register marks and enables four-point corrections for each segment to ensure accurate contour cutting over longer-length prints, even if the

#### Over-cut and corner-cut functions ensure clearly cut edges with no residues.

The over-cut function ensures sharply cut edges with no residues by making a cross cut at the start and end positions of the contour cutting. The corner-cut function ensures sharply cut edges by making cross cuts at each corner.



#### Clamp-pressure automatic-switching function enables continuous operation.

The pressure of the media clamps is automatically optimised for printing and cutting. No pressure adjustment by the operator is required during continuous operation

#### "Cut and Print" function improves the workability of thin materials.

This function prevents common problems, such as film separation and faulty cut results. by cutting the media before printing.

#### Versatile cutting methods satisfy a range of market demands.

"Half-cut" produces a series of half and die cuts, leaving a few connection points that retain the printed image on the medium. "Die cut" completely cuts the printed image from the medium. "Perforation cut" is useful for clipping images from the medium, used as crease lines.

#### Raster Link 5

#### Intuitive and user-friendly operation



1. Easy to follow icons enable intuitive and

Specifications

## Sophisticated RIP Software maximizes performance



simplify RIP operations with 'Register as Favourite' option available for regularly used layouts

e.g. Colour → White → Colour

#### Web update function is supported

This facility enables easy program updates and profile downloading to be performed via the internet.

#### Supplies

		CJV150-75	CJV150-107	CJV150-130	CJV150-160		
Printhead		On-demand piezo head					
Print resolution		360dpi, 540dpi, 720dpi, 1,080dpi, 1,440dpi					
Maximum print width		800mm	1,090mm	1,361mm	1,610mm		
Maximum media width		810mm	1,100mm	1,371mm	1,620mm		
Ink	Type/Colour	Solvent ink  SS21 (C, M, Y, K, Lc, Lm, Lk, Or, W, Si)  BS3 (C, M, Y, K)  Water-based sublimation ink  Sb53 (Bl, M, Y, K, DK, Lb, Lm) - not compatible with the CJV150-75 model					
	Package size	SS21: 440ml Ink cartridge/2L Ink pack*12 BS3: 600ml Ink pack/2L Ink pack*2 Sb53: 440ml Ink cartridge/2L Ink pack*2					
	Circulation system	MCT (Mimaki Circulation Technology) Only applies to white and silver inks					
Media thickness		1.0mm or less					
Rolled media weight		40kg or less					
Certifications		VCCI class A / FCC class A / ETL UL 60950 CE Marking (EMC, Low voltage, and Machinery directive) / CB RoHS / REACH and Energy Star / RCM					
Interface		USB 2.0, for E-mail notification function					
Power supply		Single-phase (AC 100-20V / AC 220-240V)					
Power consumption		100V: 1.44 kVA × 1 or less, 200V: 1.92 kVA × 1 or less					
Operational environment		Temperature: 20–30 C (59–86 F), Humidity: 35–65% Rh (Non condensing)					
Dimensions (W $\times$ D $\times$ H)		1,965 × 700 × 1,392mm	2,255 × 700 × 1,392mm	2,525 × 700 × 1,392mm	2,775 × 700 × 1,392mm		
Weight		126kg	142kg	157kg	168kg		


#### Ontions

Item	Item No.
Drying fan 75 / Drying fan 107	OPT-J0369 / OPT-J0368
Exhaust kit 75 / Exhaust kit 107	OPT-J0372 / OPT-J0371
150-75 Static sheet / 150-107 Static sheet	OPT-J0374 / OPT-J0373
Drying fan 130 / Drying fan 160	OPT-J0352 / OPT-J0351
Exhaust kit 130 / Exhaust kit 160	OPT-J0354 / OPT-J0353
Static prevention sheet 130 / Static prevention sheet 160	OPT-J0358 / OPT-J0356
AMF130 Kit / AMF160 Kit	OPT-J0360 / OPT-J0359
Jig-Head gap check	OPT-J0375
MBIS3 (Mimaki Bulk Ink System)	OPT-J0364
Eco case for 600 ml ink bag	OPT-J0361

	Colour			
	Cyan	SPC-0501C	440ml Ink cartridge	
	Magenta	SPC-0501M		
	Yellow	SPC-0501Y		
	Black	SPC-0501K		
	Light Cyan	SPC-0501LC		
	Light Magenta	SPC-0501LM		
	Orange	SPC-05010r		
	Light Black	SPC-0501Lk		
SS21	White	SPC-0504W-2	220ml Ink cartridge	
5521	Silver	SPC-0504Si	220ml Ink cartridge	
	Cyan	SPC-0588C	2,000ml lnk pack	
	Magenta	SPC-0588M		
	Yellow	SPC-0588Y		
	Black	SPC-0588K		
	Light Cyan	SPC-0588LC		
	Light Magenta	SPC-0588LM		
	Orange	SPC-0588Or		
	Light Black	SPC-0588Lk		
	Cyan	SPC-0667C	- 600ml lnk pack	
	Magenta	SPC-0667M		
	Yellow	SPC-0667Y		
BS3	Black	SPC-0667K		
DOS	Cyan	SPC-0693C	2,000ml Ink pack	
	Magenta	SPC-0693M		
	Yellow	SPC-0693Y		
	Black	SPC-0693K		
	Blue	SB53-BL-44	440ml Ink cartridge	
	Magenta	SB53-M-44		
	Yellow	SB53-Y-44		
	Black	SB53-K-44		
	Deep Black	SB53-DK-44		
	Light Blue	SB53-LBL-44		
Sb53	Light Magenta	SB53-LM-44		
Suus	Blue	SB53-BL-2L	2,000ml lnk pack	
	Magenta	SB53-M-2L		
	Yellow	SB53-Y-2L		
	Black	SB53-K-2L		

Deep Black

Light Blue





SB53-DK-2L SB53-LBL-2L







Affordable, integrated printer/cutter...



CIV 150 Sentes



CJV150 Series

# **Mimaki**

#### **ENGINEERING EXCELLENCE AND CREATIVE INNOVATION**

Founded in Japan in 1975, Mimaki Engineering has steadily grown by reputation and influence into a global company with large operational bases in Asia and the Pacific, United States and Europe.

ndustrial markets. In addition, Mimaki also provides hardware, software and associated consumable items, such as inks and cutting blades.

decoration and furnishing, from packaging and


· · · Mimaki delivers

# Affordable, high-spec, high-performance, integrated printer/cutter

CJV150 Series integrated printer/cutter from Mimaki provides high performance, creativity and versatility with vibrant ink types, including new Silver, Orange and Light Black, in a cost effective package for signmakers, display graphics professionals and printshops.

## CJV150 series delivers ...

- Fast printing speeds up to 56.2m² per hour
- High quality print resolution of up to 1,440dpi
- Four different printing widths: 800mm, 1,090mm, 1,361mm and 1,610mm
- Choice of multiple eco-solvent and dye sub ink sets:
  - 10-colour options (SS21) featuring; Silver, Orange, Light Black & White inks
  - Vibrant 6-colour dye sub options (Sb53)
- Nozzle Check Unit (NCU) and Nozzle Recovery System (NRS) ensure continuous print operations
- UISS and optional MBIS III on board 2 litre bulk ink system
- 3-way intelligent heater





Create ··· Metallic stickers, Decals, Die-cut labels, Signage, Vehicle graphics, Banners, Posters, PoS, Back-lit & Exhibition graphics, Garment marking, Canvas prints and much more...


The NRS substitutes defective nozzles with non-defective nozzles until the technician arrives. This feature enables ninterrupted print operations and continuous productivity.

Productivity maintenance - NRS\*




#### Prevention, print quality problems - NCU\*

The CJV150 is equipped with Mimaki's original automatic NCU. Clogged nozzles are automatically detected and cleaned by the NCU. If the clogging is not resolved by cleaning, the CJV150 automatically sets the nozzle recovery function NRS and resumes printing. These functions significantly reduce the waste printing caused by clogged nozzles during a continuous printing run.



#### Stable printing using the ink circulation system - MCT\*

MCT is a standard feature included to effectively avoid the settling of white and silver pigments in the ink lines by regularly circulating the ink. It prevents print troubles and enables stable output from the start of operation. In addition




thereby supporting environmentally and

silver inks. MCT = Mimaki Circulation

#### **Uninterrupted Ink Supply** System (UISS)


Utilises two cartridges per colour in 4-colour mode. When one cartridge runs out of ink the system switches automatically to the second cartridge of the same colour, enabling long




## 3-Way intelligent heater

A 3-way intelligent heater fixes droplets placed on media By using Mimaki's original technology in heating the media at a controlled temperature, ink can be fixed while maintaining high colour development and high image quality. Thus the CJV150 provides both steady colour development and easy handling after printing.

- Pre-heater: Heats media to the optimum temperatur before printing.
- Print heater: Dries ink after it lands on media before it bleeds, improving colour development.
- Post-heater: Enhances ink drying and achieves
- Top blower: Air blower supports drying of ink.



# **KEY TECHNICAL FEATURES · · ·**

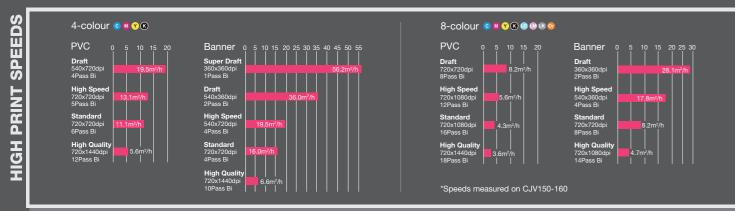




# (Mimaki Advanced Pass System 3)



#### **Waveform Control Technology** Ensures high quality print resolution, by jetting ink drops in straight lines with almost perfect round dots, delivering clear and sharp letters, lines and edges



#### Large ink dot size in high speed mode

Delivers high density print by removing the gap

## Newly developed SS21 silver ink is available. Being 1.67\* times By using the orange ink as a process colour, 94.8% of the

brighter than conventional silver inks, SS21 ink adds brilliant and beautiful mirror effects to print results



Silver colour added to catch copies and logos strikes a profound mpression on the viewers, which akes silver printing very appealing

silver ink varies as per the viewing angle. Such a high level of brightness

#### Orange Ink (Faithful colour reproduction) Light Black Ink (greater definition)

PANTONE colour chart is covered with approximate colours. Thanks to a wider gamut with the orange ink, food freshness can be without introducing unexpected colour shifts. Light black



## The light black ink improves the printed grayscale

gradation. It also faithfully represents monochrome data





