




multigraf

**MULTIGRAF
FOLDING SOLUTIONS**

MULTIGRAF 235SM / 435SM

PARALLEL FOLD PAPER FOLDER

235SM,
2 Folding Plates

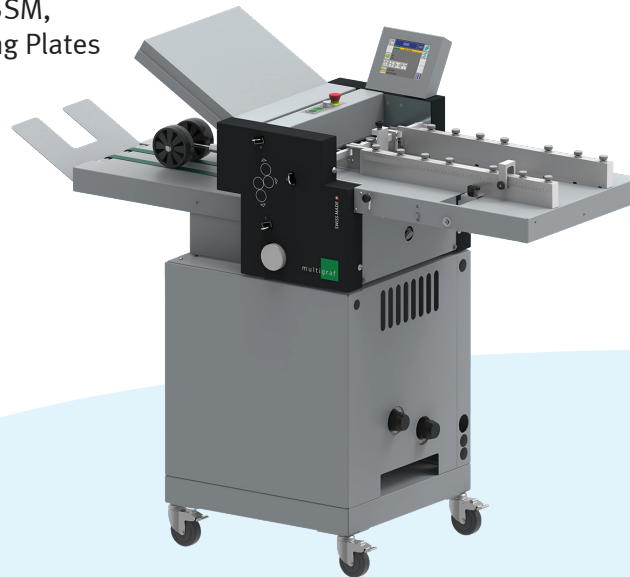

435SM,
4 Folding Plates



SWISS MADE 

FOLDING MACHINES



Description

The modular design of the Multigraf range of folding machines has always been a main feature. All models are equipped with conventional manual folding plates.

Recurring tasks can be simply saved to memory to be recalled as setup information later. This makes a further important contribution to optimisation of processing cost.

Features

- Touch screen
- Suction feeder
- 2 or 4 folding plate modules
- For A6 to A3+ formats
- Versatile
- Can be combined to form cross fold units or for other special applications
- Fold types: single / Z / letter / gate / half / engineering / french (2 pass) / double parallel / custom folds

Option

- Cross fold unit:
 - 235KM
 - 435KM


MULTIGRAF CROSS FOLD SYSTEMS

CROSS FOLD PAPER FOLDER

Cross Fold In Combination
With A Folder



Cross Fold As A
Stand Alone Unit

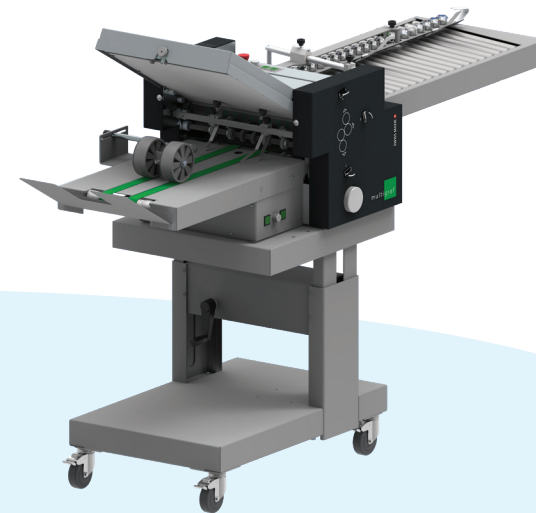

SWISS MADE 

FOLDING MACHINES

 Speed 415 sheet/min	 40- 250 gsm	 Max Size 350 x 500mm	 Min Size 90 x 120mm	 A6 to A3+
---	---	--	---	--

Description


The modular design of the Multigraf range of folding machines has always been a main feature. All models are equipped with conventional manual folding plates.

The cross folding units can be combined with various feeder, finisher or printing systems to meet customer requirements.

Features


- 2 plates 235KM
- 4 plates 435KM
- For A6 to A3+ formats
- Height adjustable stand
- Versatile
- Fold types: single / Z / letter / gate / half / engineering / double parallel / custom folds

Video





Multigraf AG
Print Finishing Systems
Grindelstrasse 26
5630 Muri AG
Switzerland



T +41 56 675 58 00

mail@multigraf.ch
multigraf.ch

Multigraf AG adheres to a policy of continuous improvement and reserves the right to modify the technical data provided in this document without prior notification. The production rates are based on optimum operating conditions and may be reduced dependent on use and ambient conditions. Subject to technical modifications and errors.